


PART NO.	OUTSIDE "DIA." "ØB"		HEIGHT "H"		REF "C"	
	MM	INCH	MM	INCH	MM	INCH
LS-LED-V04-6T	5.0	0.197	6.0	0.236	2.0	0.079
LS-LED-V04-7T	5.0	0.197	7.0	0.276	2.0	0.079
LS-LED-V04-8T	5.0	0.197	8.0	0.315	2.0	0.079
LS-LED-V04-10T	5.0	0.197	10.0	0.394	2.0	0.079
LS-LED-V04-11T	5.0	0.197	11.0	0.433	2.0	0.079
LS-LED-V04-12T	5.0	0.197	12.0	0.472	2.0	0.079
LS-LED-V04-12AT	5.0	0.197	12.5	0.492	2.0	0.079
LS-LED-V04-13T	5.0	0.197	13.0	0.512	2.0	0.079
LS-LED-V04-14T	5.0	0.197	14.0	0.551	2.0	0.079
LS-LED-V04-15T	5.0	0.197	15.0	0.591	2.0	0.079
LS-LED-V04-17T	5.7	0.224	17.0	0.669	2.3	0.091
LS-LED-V04-18T	5.0	0.197	18.3	0.720	2.0	0.079
LS-LED-V04-19T	5.0	0.197	19.0	0.748	2.0	0.079
LS-LED-V04-20T	5.0	0.197	20.0	0.787	2.0	0.079

NOTES:

- FOR 5MM(T1 3/4) 2-PIN LED
- MATERIAL FLAMMABILITY RATING UL94V-2
- CUSTOM COLOR AVAILABLE
- CUSTOM MATERIAL AVAILABLE

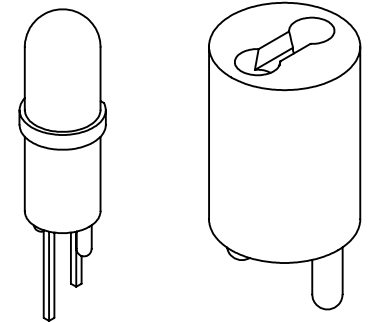

APPLICATION

DESCRIPTION				DWG DIMENSIONS UNLESS NOTED		THIRD ANGLE PROJECTION		<b>Vaisis</b> <a href="http://www.vaisis.com">www.vaisis.com</a>	
NYLON LED SPACER				DWG. No.	PART No.	DWN	DATE	CHKD	DATE
				MM [INCH]	SEE TABLE	YW	4/8/2011	YW	4/11/2011
A	INITIAL RELEASE	4/11/2011	GC	TOLERANCES UNLESS NOTED	MATERIAL	COLOR	SCALE	SHEET SIZE	SHEET No.
REV.	DESCRIPTION	DATE	APPROVED	.X=±0.20 [0.008] .XX=±0.10 [0.004] FRAC=±1/64 ANG=1°	NYLON 66	NATURAL	4:1	A	1 OF 1