



## Plastic Twist Locks Single End/Dual End

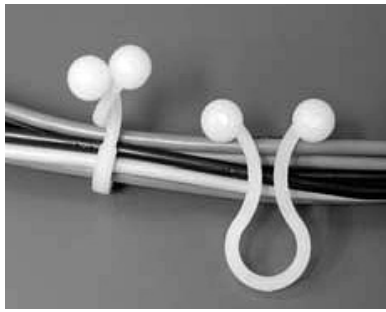


RoHS COMPLIANT

### Specifications:

**Material:** Nylon 6/6  
**UL Rating:** 94V-2  
**Color:** Natural  
**UL Listed:** See Logo




Part Number	Ref. "A", mm [in.]	Close/Bundle Dia, ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Pkg.
PCM-A-5	5.0 [0.197]	ø4.2 [0.165]	8.5 [0.335]	22.0 [0.866]	1.8 [0.071]	1000
PCM-A-8	8.3 [0.327]	ø7.0 [0.276]	12.0 [0.472]	26.2 [1.031]	2.3 [0.091]	
PCM-A-11	11.1 [0.437]	ø9.7 [0.382]	15.2 [0.598]	30.0 [1.181]	2.3 [0.091]	
PCM-A-13	13.2 [0.520]	ø11.5 [0.453]	17.2 [0.677]	32.5 [1.280]	2.3 [0.091]	
PCM-A-14A	14.7 [0.579]	ø13.2 [0.520]	18.7 [0.736]	35.0 [1.378]	2.0 [0.079]	
PCM-A-15	14.8 [0.583]	ø13.0 [0.512]	18.8 [0.740]	32.6 [1.283]	2.4 [0.094]	
PCM-A-15A	15.0 [0.591]	ø14.0 [0.551]	19.0 [0.748]	33.7 [1.327]	1.8 [0.071]	
PCM-A-18	19.2 [0.756]	ø16.3 [0.642]	23.3 [0.917]	38.5 [1.516]	2.0 [0.079]	
PCM-A-19	18.9 [0.744]	ø17.3 [0.681]	22.9 [0.902]	35.0 [1.378]	2.2 [0.087]	
PCM-A-22	22.0 [0.866]	ø20.0 [0.787]	27.5 [1.083]	42.0 [1.654]	2.0 [0.079]	
PCM-A-28	29.0 [1.142]	ø26.8 [1.055]	33.5 [1.319]	55.5 [2.185]	2.0 [0.079]	
PCM-A-30	29.6 [1.165]	ø27.0 [1.063]	33.7 [1.327]	55.5 [2.185]	2.0 [0.079]	

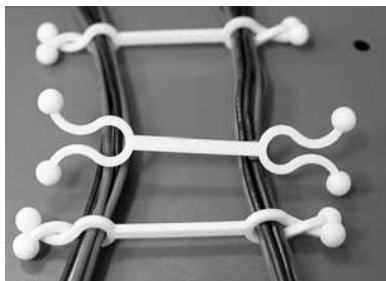

RoHS COMPLIANT

### Specifications:

**Material:** Nylon 6/6  
**UL Rating:** 94V-2  
**Color:** Natural  
**UL Listed:** See Logo

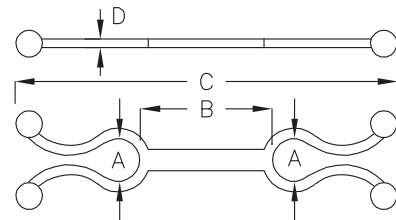

Part Number	Ref. "A", mm [in.]	Close/Bundle Dia, ø, mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Ref. "D", mm [in.]	Pkg.
PCM-2A-7	7.0 [0.276]	ø5.9 [0.232]	32.7 [1.287]	73.8 [2.906]	1.9 [0.075]	500
PCM-2A-7L	7.0 [0.276]	ø5.8 [0.228]	60.0 [2.362]	101.5 [3.996]	2.0 [0.079]	
PCM-2A-8	8.0 [0.315]	ø6.5 [0.256]	10.2 [0.402]	56.5 [2.224]	1.9 [0.075]	
PCM-2A-10	10.0 [0.394]	ø8.6 [0.339]	30.4 [1.197]	82.2 [3.236]	2.0 [0.079]	
PCM-2A-10A	10.0 [0.394]	ø8.6 [0.339]	30.0 [1.181]	82.2 [3.236]	3.0 [0.118]	
PCM-2A-13S	14.8 [0.583]	ø12.2 [0.480]	85.0 [3.346]	147.8 [5.819]	2.0 [0.079]	200

all dimension units in millimeter (mm) unless noted otherwise

www.vaisis.com | P: 626-795-6696 | F: 626-795-6896 | Email: sales@vaisis.com

**Vaisis**

### Plastic Cable Clips Freestanding



Fig. 1





Fig. 2



Please Refer to Fig.1 For the Following Table

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close Dia. "D", ø, mm [in.]	Standard Package
PCM-FCM-20	14.2 [0.559]	4.1 [0.161]	6.0 [0.236]	ø4.4 [0.173]	1000
PCM-FCM-20C	8.6 [0.339]	2.3 [0.091]	5.0 [0.197]	ø2.1 [0.083]	

Please Refer to Fig.2 For the Following Table

Part Number	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", mm [in.]	Close Dia. "D", ø, mm [in.]	Close Dia. "E", ø, mm [in.]	Standard Package
PCM-FCM-20A	19.0 [0.748]	4.1 [0.161]	4.1 [0.161]	ø4.2 [0.165]	ø4.2 [0.165]	1000
PCM-FCM-20F	22.9 [0.902]	5.1 [0.201]	5.1 [0.201]	ø5.2 [0.205]	ø5.2 [0.205]	
PCM-FCM-20H	26.5 [1.043]	6.2 [0.244]	5.6 [0.220]	ø4.9 [0.193]	ø6.2 [0.244]	

RoHS COMPLIANT

**Specifications:**

Material: Nylon 6/6  
 UL Rating: 94V-2  
 Color: Natural

### Plastic High Voltage Insulator Rings Freestanding

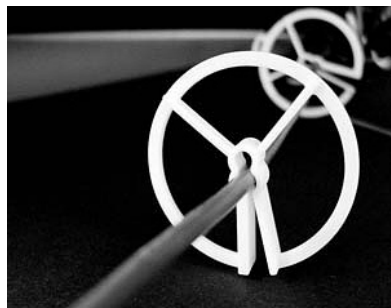


Fig. 1





Fig. 2



Please Refer to Fig.1 For the Following Table

Part Number	Cable Dia., ø, mm [in.]	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", ø, mm [in.]	Standard Package
PCM-HV-1	ø4.5-5.2 [0.177-0.205]	22.0 [0.866]	26.7 [1.051]	ø49.2 [1.937]	100
PCM-HV-1S	ø3.7-4.2 [0.146-0.165]	22.0 [0.866]	26.7 [1.051]	ø49.2 [1.937]	
PCM-HV-3	ø4.5-5.3 [0.177-0.209]	29.9 [1.177]	34.9 [1.374]	ø64.0 [2.520]	

Please Refer to Fig.2 For the Following Table

Part Number	Cable Dia., ø, mm [in.]	Ref. "A", mm [in.]	Ref. "B", mm [in.]	Ref. "C", ø, mm [in.]	Ref. "D", mm [in.]	Pkg.
PCM-HV-1TS	ø4.2-4.7 [0.165-0.185]	23.4 [0.921]	28.2 [1.110]	ø49.3 [1.941]	12.0 [0.472]	100
PCM-HV-3T	ø4.5-4.3 [0.177-0.169]	32.5 [1.280]	37.3 [1.469]	ø67.5 [2.657]	10.0 [0.394]	

RoHS COMPLIANT

**Specifications:**

Material: Nylon 6/6  
 UL Rating: 94V-2  
 Color: Natural  
 UL Listed: See UL Logo

Cable Management